

**TOKAI**

High Power

# **GASOLINE GENERATOR** Series



EC 2500CXI




EC 3800CXI



EC 6500CXI-E

# FOR DURABLE & LONG RUNNING OPERATION WITH STABLE OUTPUT VOLTAGE

The efficient combustion assured by Tokai OHV 4-stroke engine technology delivers solid, dependable power while using nearly 30% less fuel than comparable side-valve engines. Tokai Automatic Voltage Regulator (AVR) system features advanced microelectronics that quickly and automatically adjust the output voltage to compensate for fluctuations occurring when equipment loads change. The result is cleaner and stable electricity ideal for powering even sensitive equipment.

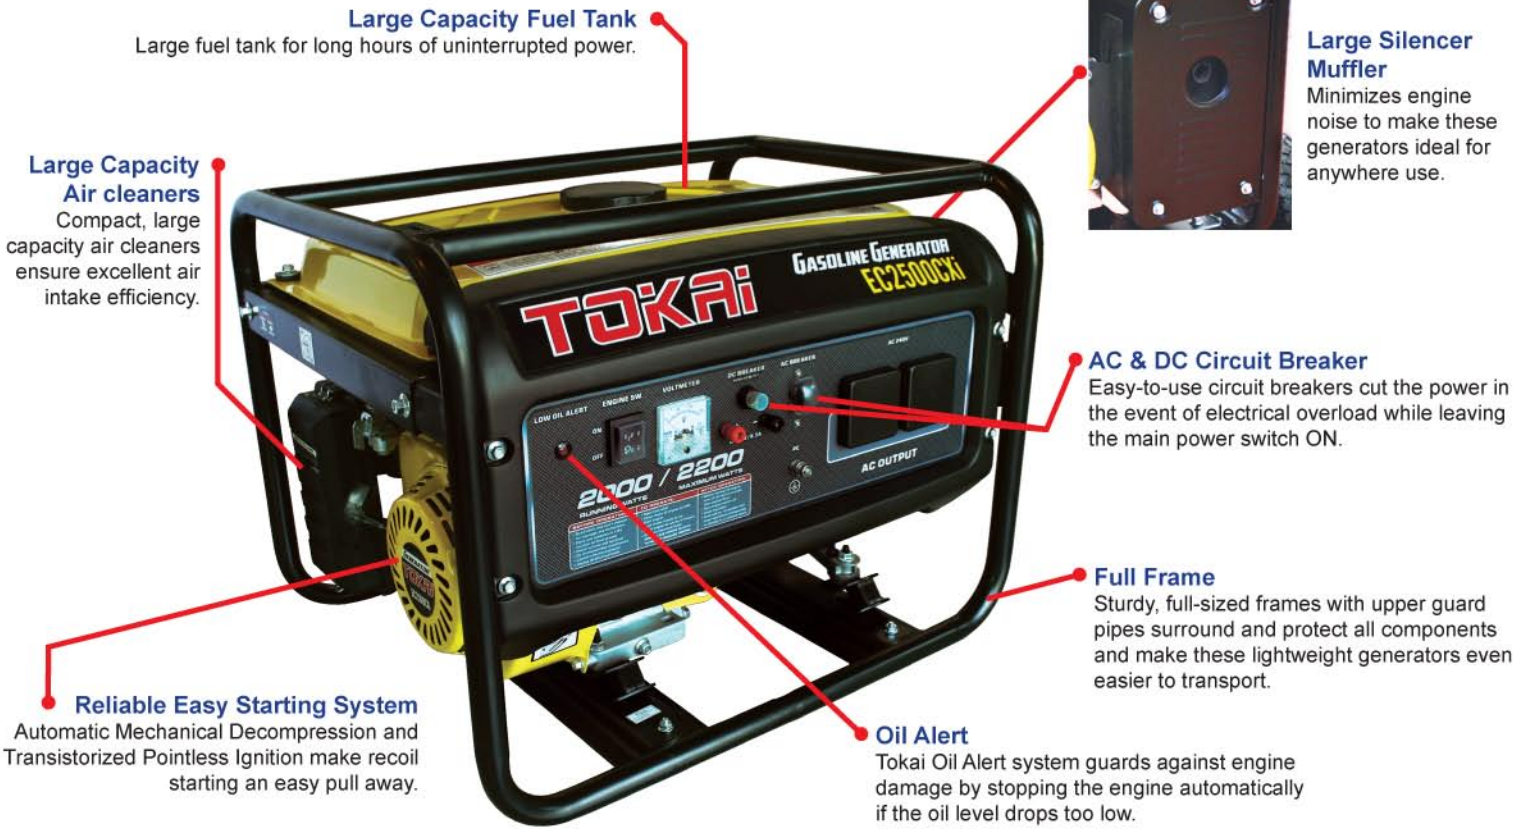

Model	TK950i	EC1500CX	EC2500CXi	EC3800CXi	EC6500CXi	EC6500CXi-E	EC8000CXi-E
Engine Type	[2 stroke]	Single cylinder, 4 stroke, forced cooling, OHV					
Displacement	63cc	97cc	196cc	212cc	389cc		420cc
Fuel Tank Capacity	4L	6.7L	18L		25L		
Continuing Time	5.5h	7h	15h		9h		8h
Rated Frequency	50Hz						
Rated Voltage	240V						
Voltage Regulator System	Automatic Voltage Regulation						
Rated Output	650w	1000w	2000w	2800w	5000w		6000w
Max Output	800w	1100w	2200w	3100w	5500w		6500w
Charging Voltage	-	12V(DC)					
Charging Current	-	10A(DC)	8.3A(DC)				
Starting System	Easy Recoil Starter					Easy Recoil Starter / Keyless Electric-start	
Noise	64dB(A)	68dB(A)	≤ 76dB(A)				
Outlets	1x 13A		2x 13A		2x 13A, 1x 15A	3x 13A, 1x 15A	2x 13A, 1x 15A
Battery	-	-	-	-	Included		
Handles & Wheels	-	-	Optional			Included	
Low Oil Shutdown System	Yes						
Dimension	360x300x300	440x350x360	590x430x480		675x540x540		680x540x540
Net Weight	17kg	26kg	43kg	54kg	77kg		86kg

\*Specifications are subject to change without notice.  
Performance may vary depending on the environmental conditions.