

**Made In  
TAIWAN**

Stock Code :

880218007 - BF205AS (2") (0.5HP / 1PH)  
880218032 - BF205S (2") (0.5HP / 1PH)  
880218005 - BF315T (3") (2HP / 3PH)  
880218006 - BF315S (3") (2HP / 1PH)  
880218018 - BF315AT (3") (2HP / 3PH)  
880218011 - BF437T (4") (5HP / 3PH)

## FEATURES

1. Dependable laminated sheet of SI Steel is adopted to motor; shaft and rotor are machining precisely to raise stability and efficiency of motor.
2. Impeller is designed to special water flow, muddy liquid and other various wastewater can be efficiently drained.
3. The product range is up to 15HP, dual SIC mechanical seals is built in (3HP and above).
4. Inner cable wires and cable base are upgraded by filing EPOXY to raise humidity-resistance.
5. Superior design to easily disassemble motor and pump housing for maintenance.

## APPLICATIONS

Drainage of basement, food market and animal husbandry, water treatment of waste water plant, drainage of water refining tank and drainage of various industrial waste water etc.

Note :

S = Single phase

T = Three phase

A = Automatic

(Float Switch is provided)

AS = Automatic Single Phase


AT = Automatic Three Phase



BF-205

BF-315

BF-437

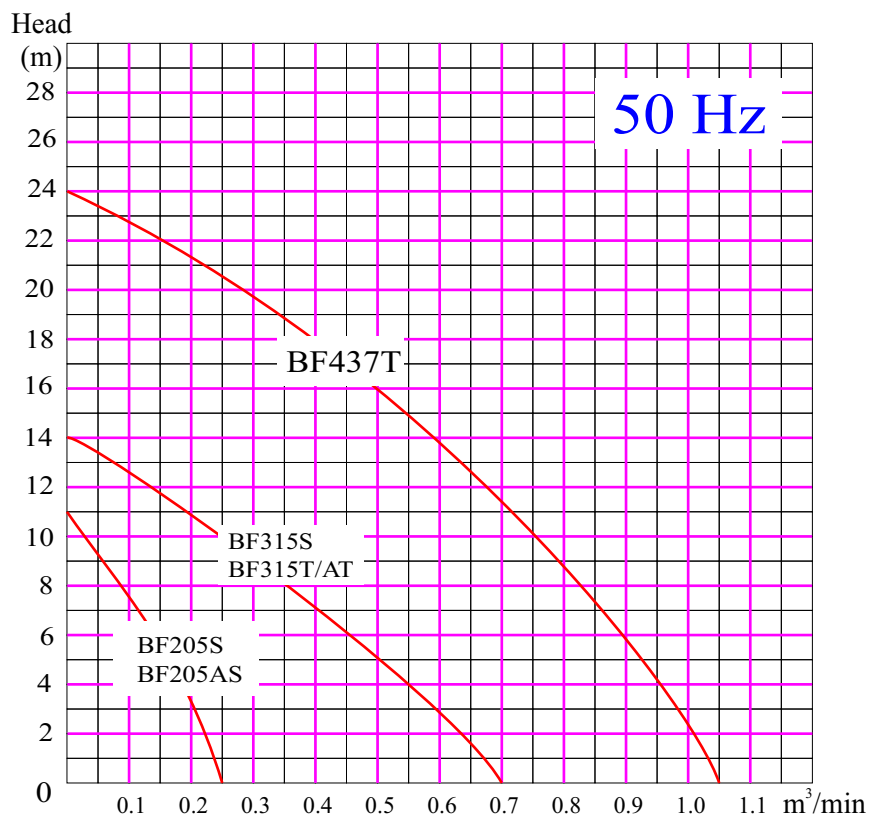

| Model     | Caliber | Power | Phase/Pole | Voltage | Std. Performance |            | Max. Performance |            |
|-----------|---------|-------|------------|---------|------------------|------------|------------------|------------|
|           | (inch)  | (HP)  | (PH / P)   | (V)     | (m)              | (m³ / min) | (m)              | (m³ / min) |
| BF205AS   | 2       | 0.5   | 1 / 2      | 240     | 8                | 0.1        | 11               | 0.25       |
| BF205S    | 2       | 0.5   | 1 / 2      | 240     | 8                | 0.1        | 11               | 0.25       |
| BF315S    | 3       | 2     | 1 / 2      | 240     | 8                | 0.5        | 14               | 0.70       |
| BF315T/AT | 3       | 2     | 3 / 2      | 415     | 8                | 0.5        | 14               | 0.70       |
| BF437T    | 4       | 5     | 3 / 2      | 415     | 15               | 0.6        | 24               | 1.05       |

\*\*\*Product's specification may subject to change without further notice.

\*\*\*Actual product may slightly differ from pictures shown.

ESM107a  
(07/12/15)