

Tideway®

2" Stainless Steel Pump



(880207013)

SS50BF-1PH

1.5kW / 1PH

240V / 50HZ

8.8A

2900r/min

10.5m

300L/min

21m

50m³/h

425x257x310(mm)



(880207006)

SS50BF-3PH

1.5kW / 3PH

Power Voltage 415V / 50HZ

Ampere 2.7A

Speed 2900r/min

Std. Head 10.5m

Std. Flow 300L/min

Max. Head 21m

Max. Flow 50m³/h



Ctn. Dim. 430x245x295(mm)

Features:

- Hydraulic bulge technology is adopted, sturdy construction.
- Compact design.
- Efficient spiral cased pump body design.
- Open impeller, convey solid with diameter 19mm.
- The material of liquid parts is SUS304.
- Mechanical shaft seal for security and tightness.
- Multi-purpose, transport a wide range of liquid.
- Connection mode: Thread, Hose connection.

Applications:

- It's suitable for convey solid suspension in food processing.
- Clean vegetable, meat or fish.
- Clean bottle, can or glassware etc.
- Circulation and cleaning system for assembly.
- Processing treatment on painting and general dirty liquid.
- Convey weak corrosive liquid.
- Drainage system.
- Swimming pool system.
- Farmland irrigation system.

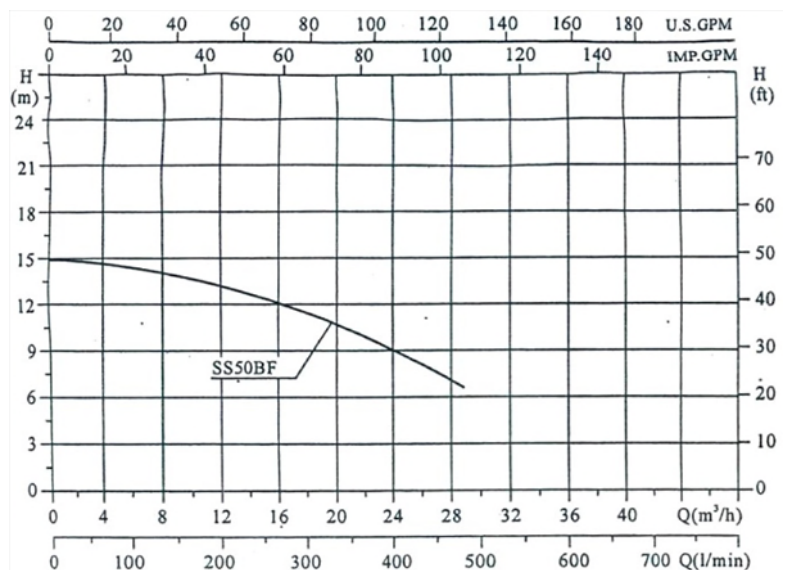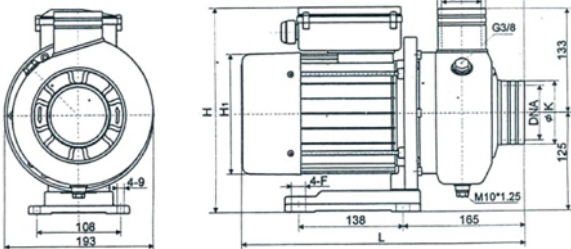

Model	H		H1	L	K	DNA	DNM
	Single-phase	Three phase					
SS50BF	265	235	155	378	62.5	G2	G2

Model	Power P2 (KW)	Flow	Flow										
			L/min	0	100	200	300	400	500	550	600	700	800
			m³/h	0	6	12	18	24	30	33	36	42	48
SS50BF	1.5	H (m)		15	14	13	10.5	9	6				

***Product's specification may subject to change without further notice.
 ***Actual product may slightly differ from pictures shown.

ESM343
(16/12/15)